


Description

United Silicon Carbide, Inc. offers the xR series of high performance SiC Schottky diodes. With zero reverse recovery charge and 175°C maximum junction temperature, USCi's diodes are ideally suited for high frequency and high efficiency power systems with minimum cooling requirements.

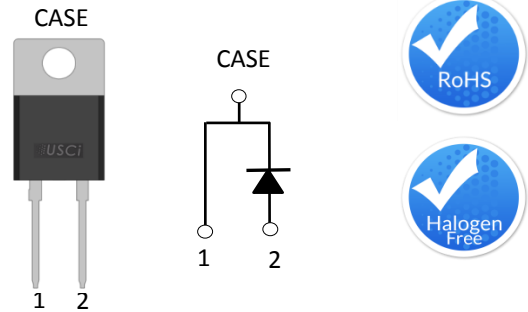

Part Number	Package	Marking
UJ2D1215T	TO-220-2L	UJ2D1215T

Features

- ◆ Positive temperature coefficient for safe operation and ease of paralleling
- ◆ 175°C maximum operating junction temperature
- ◆ Extremely fast switching not dependent on temperature
- ◆ Essentially no reverse or forward recovery
- ◆ RoHS compliant

Typical Applications

- ◆ Power converters
- ◆ Industrial motor drives
- ◆ Switching-mode power supplies
- ◆ Power factor correction modules

Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
DC blocking voltage	V_R		1200	V
Repetitive peak reverse voltage, $T_j=25^\circ\text{C}$	V_{RRM}		1200	V
Surge peak reverse voltage	V_{RSM}		1200	V
Maximum DC forward current	I_F	$T_C = 138^\circ\text{C}$	15	A
Non-repetitive forward surge current sine halfwave	I_{FSM}	$T_C = 25^\circ\text{C}, t_p = 10\text{ms}$	112.5	A
		$T_C = 110^\circ\text{C}, t_p = 10\text{ms}$	90	
Repetitive forward surge current sine halfwave, $D=0.1$	I_{FRM}	$T_C = 25^\circ\text{C}, t_p = 10\text{ms}$	51.2	A
		$T_C = 110^\circ\text{C}, t_p = 10\text{ms}$	31.3	
Non-repetitive avalanche energy	E_{AS}	$T_j = 25^\circ\text{C}, L = 10\text{mH}, I_{pk}=5\text{A}, V_{DD}=100\text{V}$	132	mJ
Power dissipation	P_{Tot}	$T_C = 25^\circ\text{C}$	187	W
		$T_C = 138^\circ\text{C}$	46	
Maximum junction temperature	$T_{J,max}$		175	$^\circ\text{C}$
Operating and storage temperature	T_J, T_{STG}		-55 to 175	$^\circ\text{C}$
Soldering temperatures, wavesoldering only allowed at leads	T_{sold}	1.6mm from case for 10s	260	$^\circ\text{C}$

Electrical Characteristics

T_J = +25°C unless otherwise specified

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Forward voltage	V _F	I _F = 15A, T _J = 25°C	-	1.5	1.7	V
		I _F = 15A, T _J = 175°C	-	2.5	3	
Reverse current	I _R	V _R =1200V, T _J =25°C	-	45	375	μA
		V _R =1200V, T _J =175°C	-	90	1000	
Total capacitive charge ⁽²⁾	Q _C	V _R =800V		69		nC
Total capacitance	C	V _R =1V, f=1MHz		730		pF
		V _R =400V, f=1MHz		64		
		V _R =800V, f=1MHz		51		
Capacitance stored energy	E _C	V _R =800V		17.5		μJ

(2) See Figure 8, Q_C is independent on T_J, di_F/dt, and I_F as shown in the application note USCi_AN0011.

Thermal characteristics

Parameter	symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance	R _{θJC}			0.6	0.8	°C/W

Typical Performance

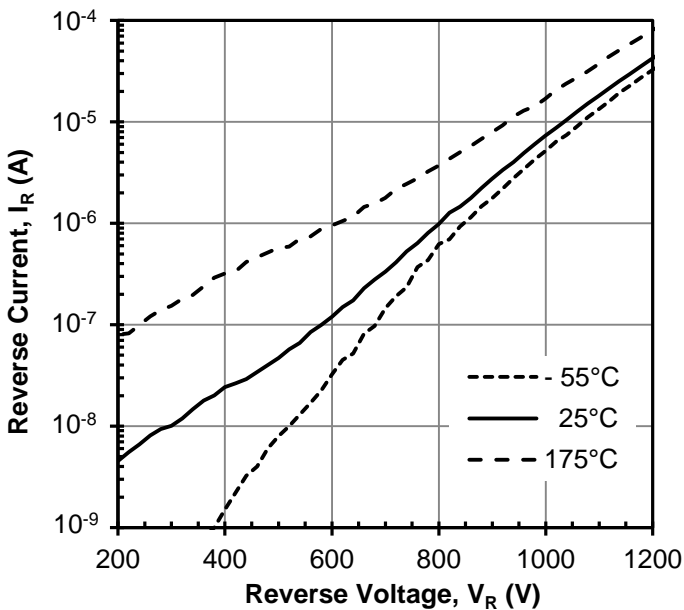


Figure 1 Typical reverse characteristics

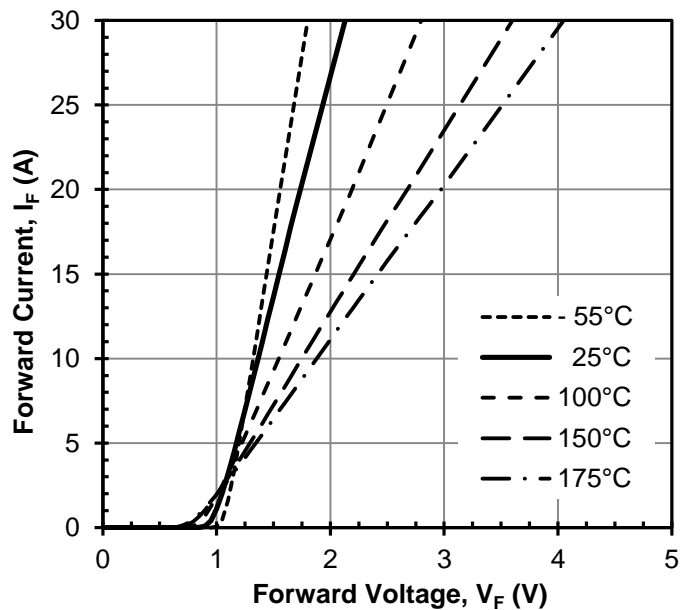


Figure 2 Typical forward characteristics

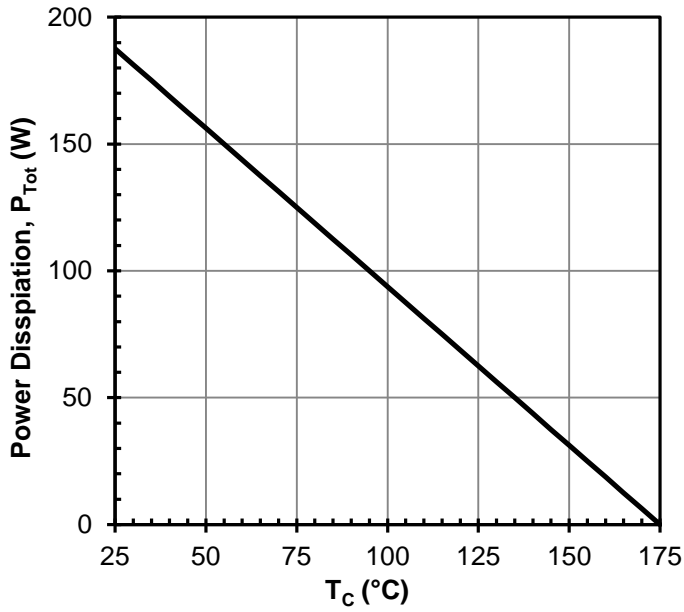


Figure 3 Power dissipation

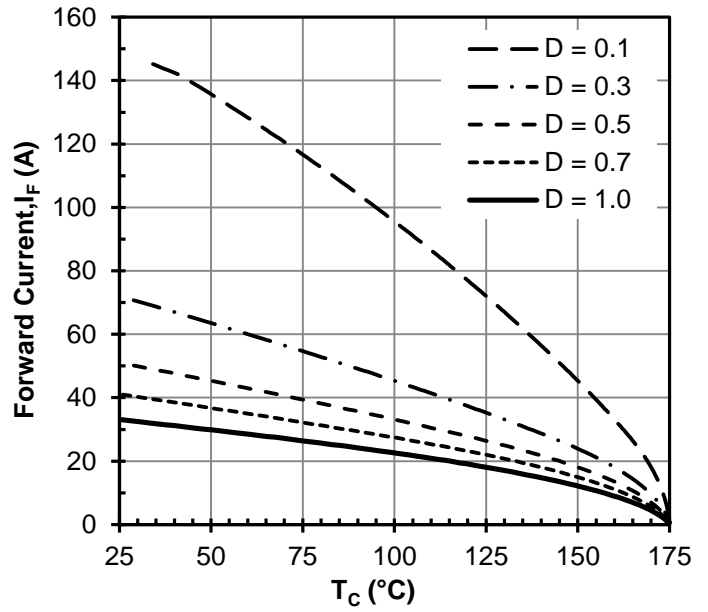


Figure 4 Diode forward current

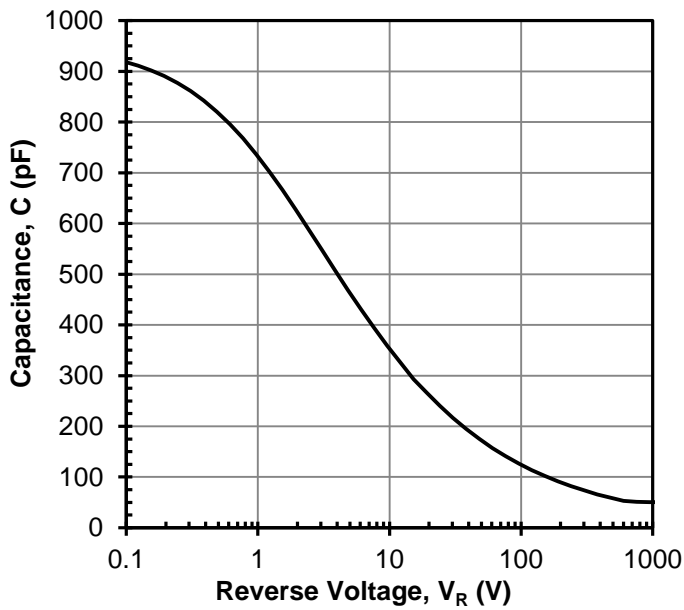


Figure 5 Capacitance vs. reverse voltage

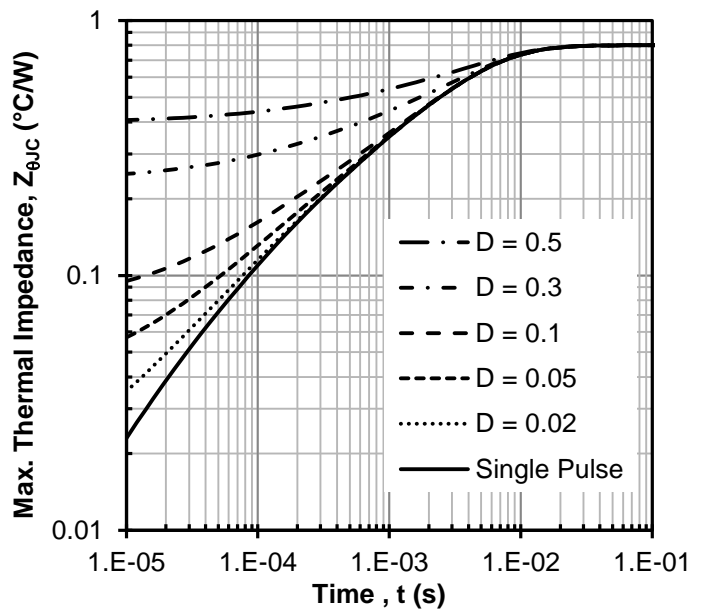


Figure 6 Maximum transient thermal impedance

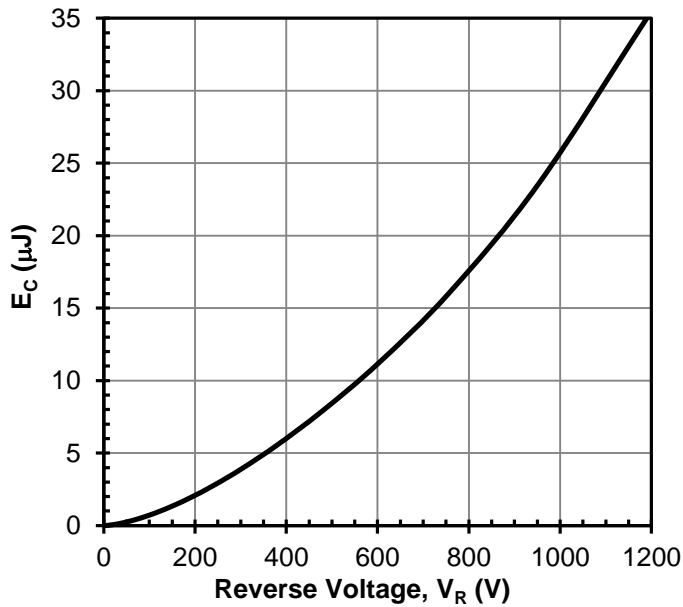


Figure 7 Typical capacitance stored energy vs. reverse voltage

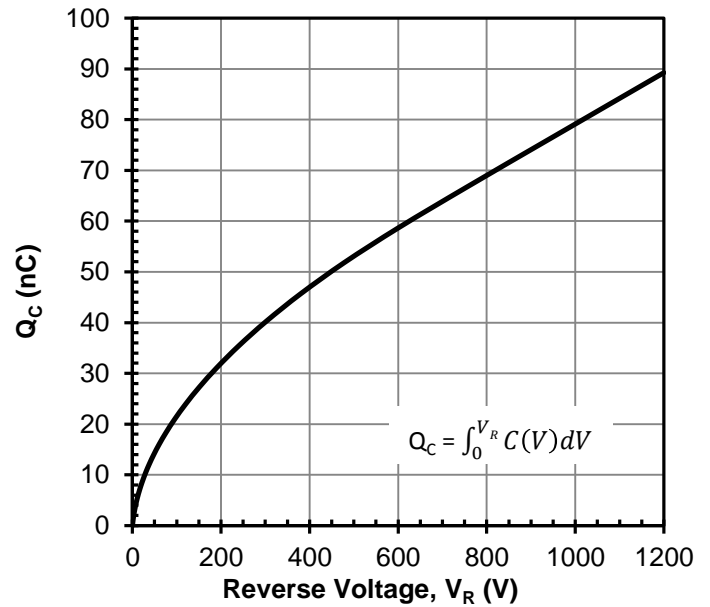


Figure 8 Typical capacitive charge vs. reverse voltage


Disclaimer

United Silicon Carbide, Inc. reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. United Silicon Carbide, Inc. assumes no responsibility or liability for any errors or inaccuracies within.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.

United Silicon Carbide, Inc. assumes no liability whatsoever relating to the choice, selection or use of the United Silicon Carbide, Inc. products and services described herein.

TO-220-2L OUTLINE

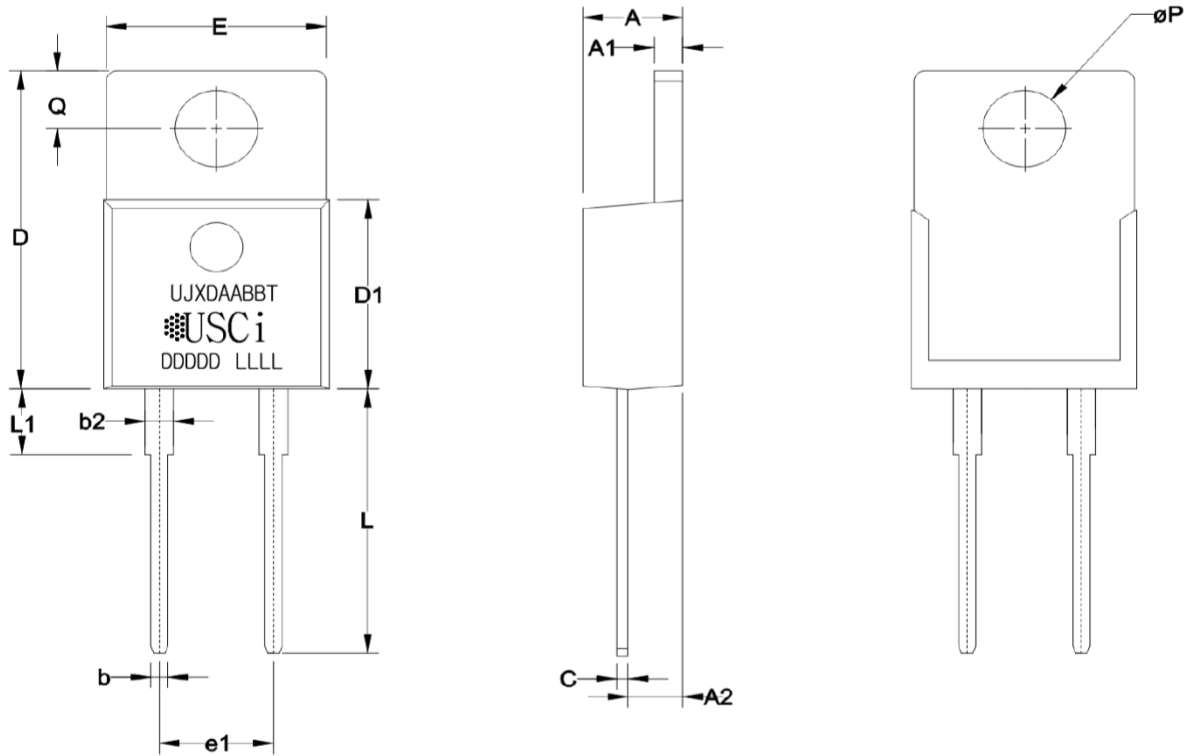

DIM	INCHES		MILLIMETERS	
	min	max	min	max
A	0.165	0.185	4.19	4.70
A1	0.048	0.052	1.22	1.32
A2	0.094	0.098	2.39	2.49
b	0.025	0.035	0.64	0.89
b2	0.045	0.055	1.14	1.40
C	0.018	0.025	0.46	0.64
D	0.595	0.615	15.11	15.62
D1	0.355	0.365	9.02	9.27
E	0.381	0.391	9.68	9.93
e1	0.198	0.202	5.03	5.13
L	0.500	0.510	12.70	12.95
L1	0.120	0.150	3.05	3.81
ØP	0.143	0.147	3.63	3.73
Q	0.100	0.120	2.54	3.05

PART MARKING

UJXDAABBT


 DDDD LLLL

U =	USCi
JXD =	DIODE
X =	GENERATION
AA =	VOLTAGE RATING
BB =	CURRENT RATING
T =	TO-220-2L

DDDD= DATE CODE

LLLL = LOT CODE

TO-220-2L TUBE OUTLINE

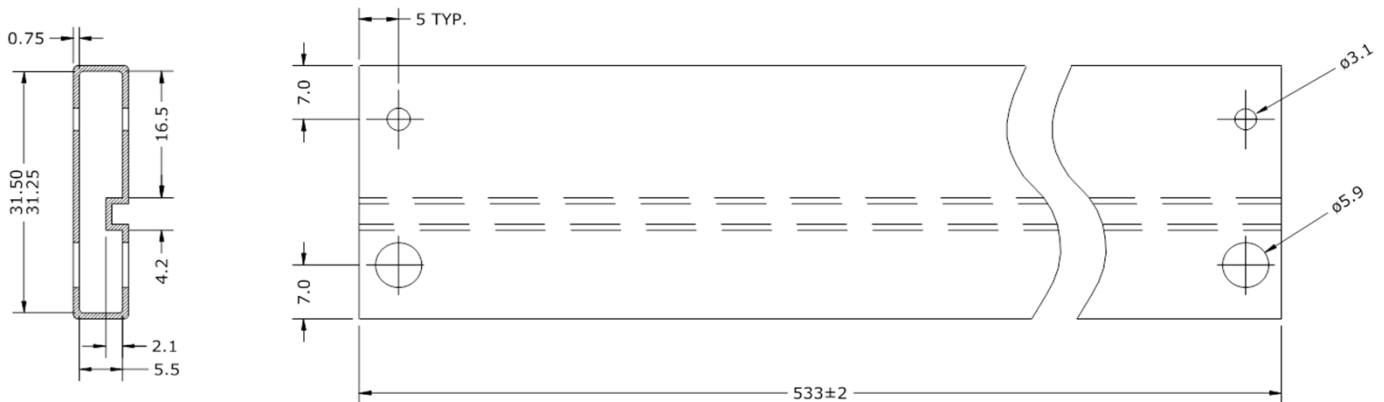

ALL UNITS IN MILLIMETERS
 TOLERANCES +/-0.25mm UNLESS OTHERWISE SPECIFIED

50 units per tube

Disclaimer

United Silicon Carbide, Inc. reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice. United Silicon Carbide, Inc. assumes no responsibility or liability for any errors or inaccuracies within.

United Silicon Carbide, Inc. assumes no liability whatsoever relating to the choice, selection or use of the United Silicon Carbide, Inc. products and services described herein.

Information on all products and contained herein is intended for description only. No license, express or implied, to any intellectual property rights is granted within this document.